

Inner DC Block

DB18N2A



10MHz-18GHz, N Type, 50 Volts

Rev 1


Electrical & Environmental

| | |
|-----------------|----------------|
| Impedance | 50 ohm |
| Frequency Range | 10 MHz-18 GHz |
| VSWR | 1.3 max |
| Insertion Loss | 0.6dB max |
| Voltage Rating | 50 Volts max |
| Operating Temp | -55°C to 100°C |
| RoHS | Compliant |

Mechanical

| | |
|----------------|---|
| Connector | N female to N male (other configurations available) |
| Connector Body | Ternary alloy plated brass |
| Center Contact | Gold plated beryllium copper/brass |
| Net Weight | About 50g |

Dimensions(mm)

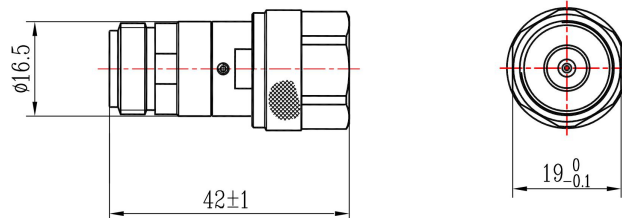

Typical Test Data

