


# MEQ6-7ASM

## Passive GaAs MMIC 7GHz Equalizer

### DEVICE OVERVIEW

#### General Description

The MEQ6-7ASM passive MMIC equalizer QFN is an ideal solution for compensating for low pass filtering effects in RF/microwave and high speed digital systems. They provide positive slope from DC to 7GHz with DC attenuation options between 3 and 12dB. The unique design offers superior return loss to competitors. GaAs MMIC technology provides consistent unit-to-unit performance in a small, low cost form factor.



[Download s-parameters here](#)

#### Features

- DC attenuation options from 3 to 12dB
- Typical Insertion Loss 1.1dB at 7GHz
- VSWR < 1.5:1 Over Entire Band

#### Applications

- RF Transceivers
- High-Speed Data
- Telecom
- Cable Loss Compensation
- Amplifier Compensation

#### Functional Block

#### Diagram



#### Part Ordering Options

| Part Number                  | Description   | Package | Packing Size | Green Status | Product Lifecycle | Export Classification |
|------------------------------|---|---------|--------------|--------------|-------------------|-----------------------|
| MEQ6-7ASM                    | Passive GaAs MMIC 7GHz Equalizer                    | QFN     | -            | REACH RoHS   | Released          | EAR99                 |
| <a href="#">EVAL-MEQ6-7A</a> | Evaluation Board, Passive GaAs MMIC 7 GHz Equalizer | EVAL    | -            | REACH RoHS   | Released          | EAR99                 |
| <a href="#">MEQ6-7A-TR</a>   | Tape and Reel, Passive GaAs MMIC 7GHz Equalizer     | QFN     | 7"           | REACH RoHS   | Released          | EAR99                 |

### Table Of Contents

- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Electrical Specifications
  - Typical Performance Plots
- **Mechanical Data**
  - Outline Drawing
- **Footprint Image**


### Revision History

| Revision Code | Revision Date | Comment                                |
|---------------|---------------|--|
| -             | 2018-05-01    | Datasheet Initial Release              |
| A             | 2018-08-01    | Added EVAL Outline                     |
| B             | 2018-11-01    | Update EVAL Outline                    |
| C             | 2019-03-01    | Updated ESD Rating                     |
| D             | 2019-05-01    | Added Package Dimension Tolerance Spec |
| E             | 2019-08-01    | Added SM Footprint                     |




### Port Configuration and Functions

#### Port Diagram

A top-down view of the MEQ6-7A CH package outline drawing is shown below. The MEQ equalizers are symmetrical allowing Port 1 or Port 2 to be used as the input.

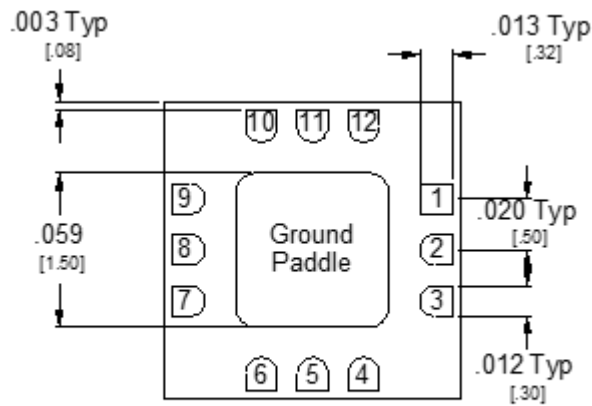

#### Port Functions

| Port  | Function          | Description   | Equivalent Circuit for Package   |
|-------|-------------------|---|--|
| GND   | Ground            | SM package ground path is provided through the ground paddle.                                 | <b>Pad</b>  |
| Pin 1 | RF Input / Output | Port 1 is DC connected to ground through a resistor. DC block is required if voltage present. | <b>P1</b>   |
| Pin 9 | RF Input / Output | Port 2 is DC connected to ground through a resistor. DC block is required if voltage present. | <b>P2</b>   |

## Specifications

### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

| Parameter                     | Maximum Rating | Unit |
|-------------------------------|----------------|------|
| Maximum Operating Temperature | 100            | °C   |
| Maximum Storage Temperature   | 125            | °C   |
| Minimum Operating Temperature | -55            | °C   |
| Minimum Storage Temperature   | -65            | °C   |
| Port 1 DC Current             | 40             | mA   |
| Port 2 DC Current             | 40             | mA   |
| Power Handling, at any Port   | 30             | dBm  |

### Package Information

| Parameter  | Details            | Rating       |
|------------|--------------------|--------------|
| ESD        | 250 to < 500 Volts | HBM Class 1A |
| Dimensions | -                  | 3 x 3 mm     |




### Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the equalizer in a CH package with a sine wave input applied to port 1. Min and Max limits are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

| Parameter      | Test Conditions | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ | Max | Unit |
|----------------|-----------------|-------------------------|-------------------------|-----|-----|-----|------|
| Insertion Loss | Freq=0GHz       | -                       | -                       | -   | 6   | -   | dB   |
| Insertion Loss | Freq=7GHz       | -                       | -                       | -   | 1.1 | -   | dB   |
| Return Loss    | Freq=0-7GHz     | 0                       | 7                       | -   | 29  | -   | dB   |

Equalizer is symmetrical. Reverse measurement is equivalent to forward measurement. All measurements taken in eval board without de-embedding.


### Typical Performance Plots

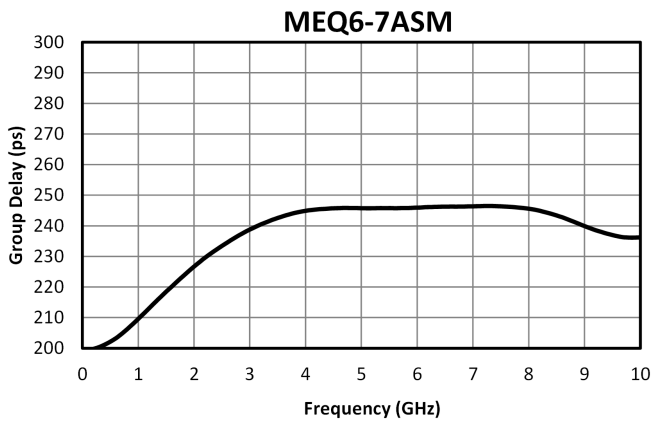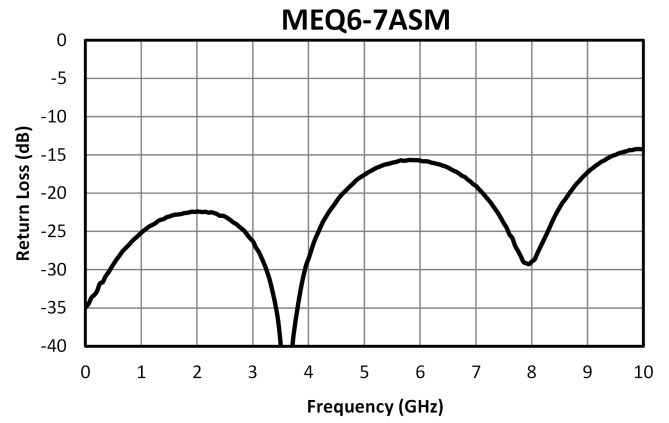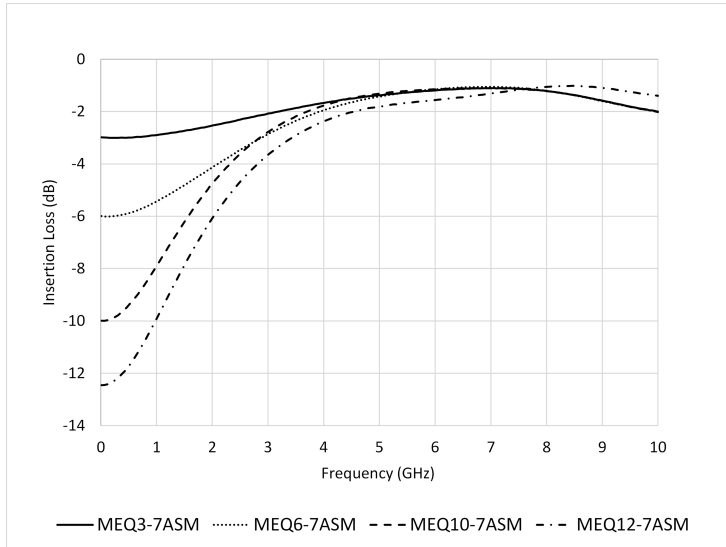

### Mechanical Data


### Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

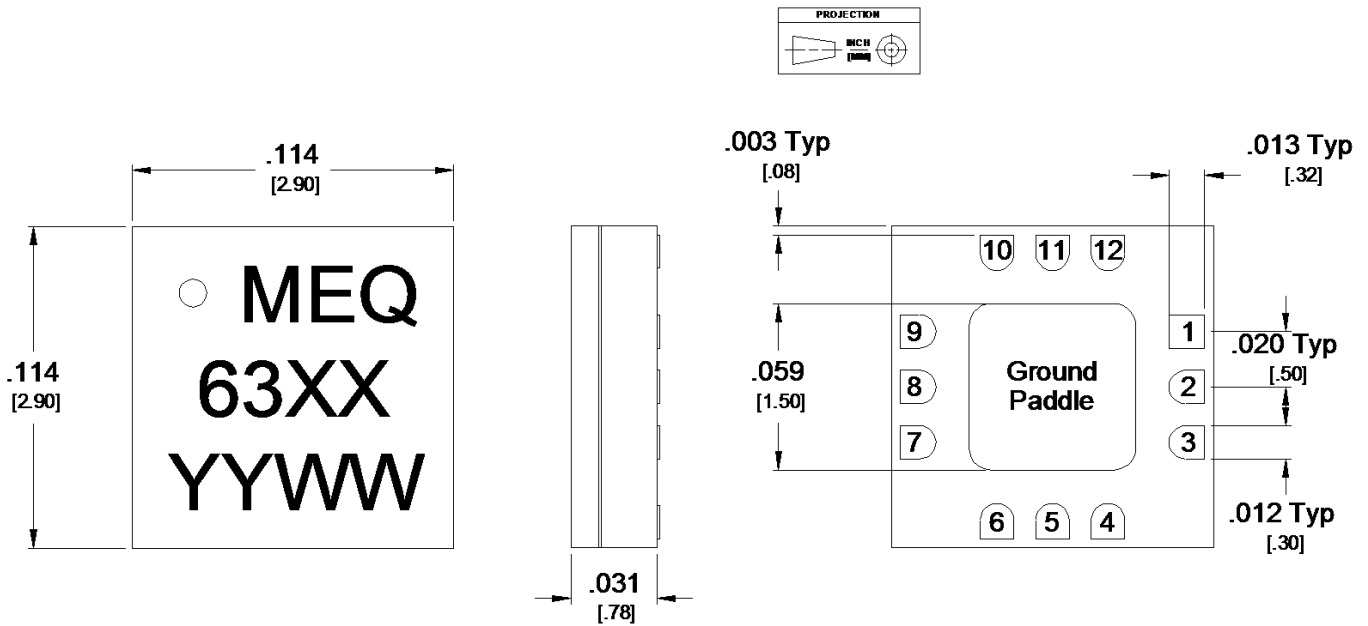

**Footprint Image**


Download : [Footprint Drawing](#)

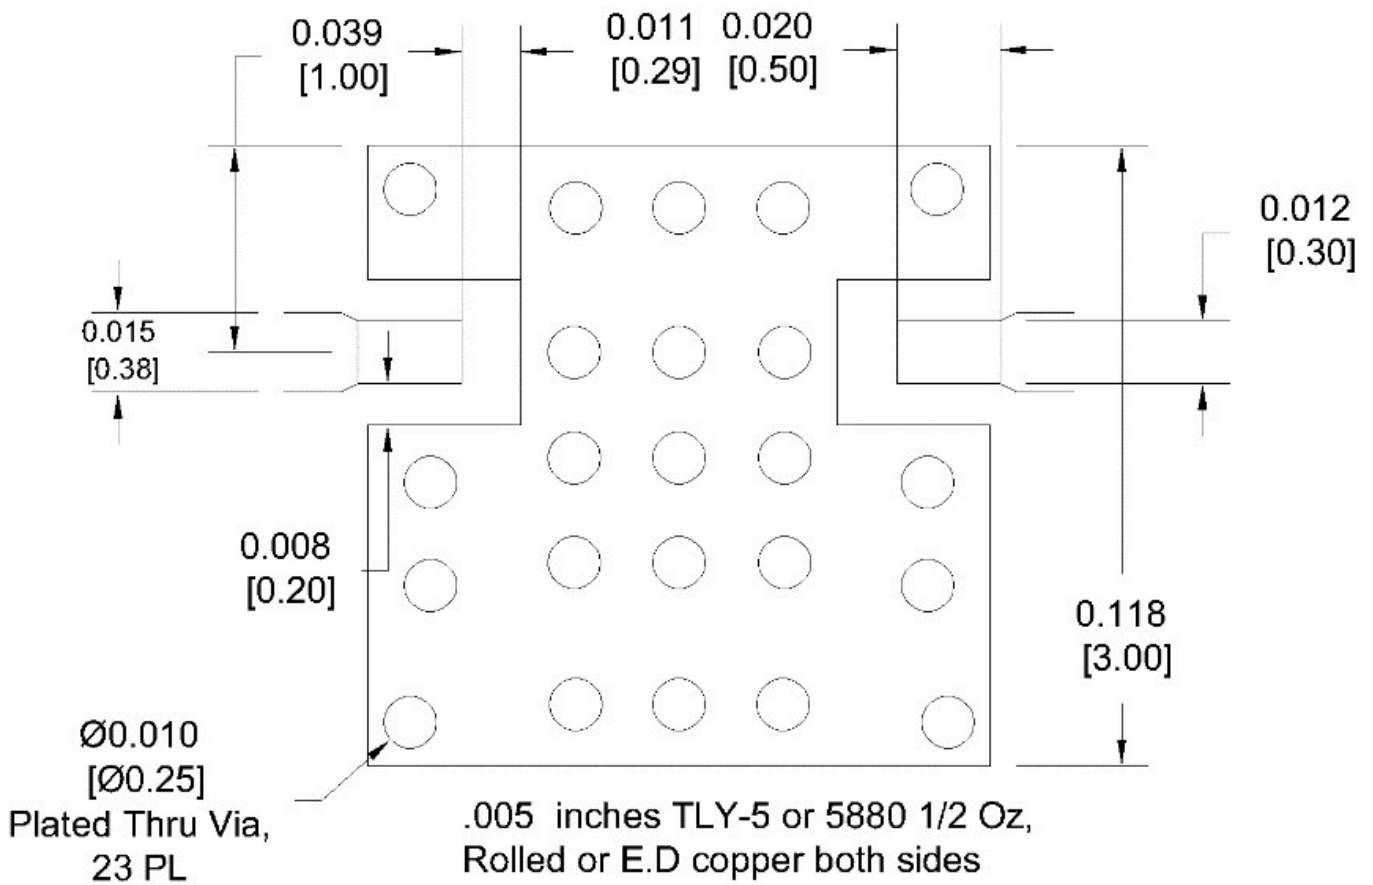



## MEQ6-7ASM

### Passive GaAs MMIC 7GHz Equalizer

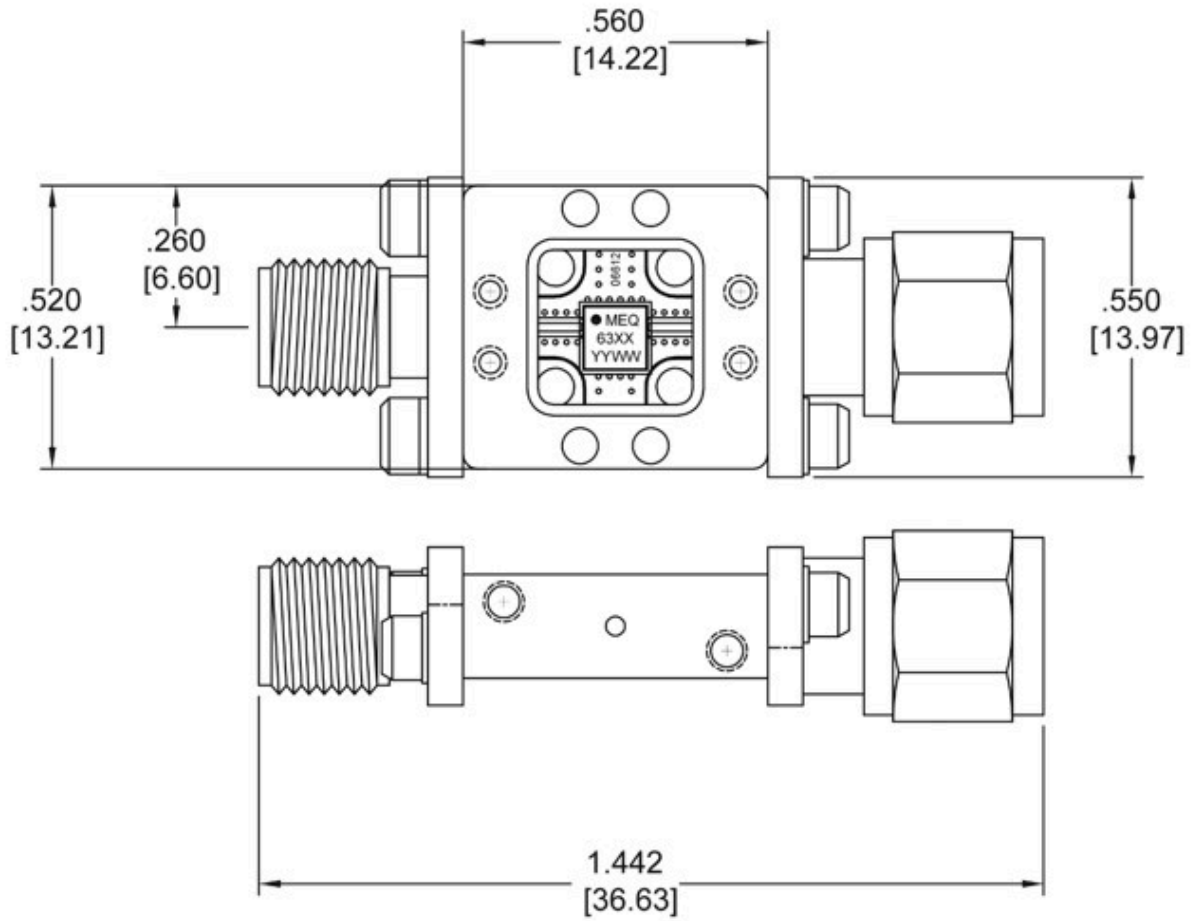

| XX | Part Number   |
|----|---------------|
| 33 | Eval-MEQ3-7A  |
| 34 | Eval-MEQ6-7A  |
| 35 | Eval-MEQ10-7A |
| 44 | Eval-MEQ12-7A |

| Port | Connector Type |
|------|----------------|
| I    | SMA Female     |
| O    | SMA Male       |

Note: Eval-Package Connectors are not removeable.

Unless otherwise specified, dimensions are in inches. Tolerances are:

.XX ±.02  
.XXX ±.005

**DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2018 - 2019, Marki Microwave, Inc