



Coaxial Fixed Attenuator

RFH18XXND350-D

DC-18 GHz, 20-60 dB, 350 Watts, N, Unidirectional

Rev 3

Electrical

Impedance	50 ohm		
Frequency Range	DC-18 GHz		
VSWR	1.45 max		
Input Avg Power	350W@ 25°C ambient, derating linearly to 35W at 100°C		
Peak Power	5kW (5 micro-sec pulse width, 2% duty cycle)		
Direction	Unidirectional, N male input, N female output (other configurations available)		
Attenuation(dB)	30	40	50,60
Accuracy(dB)	+0.6	±1.5	±1.5


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 5900 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

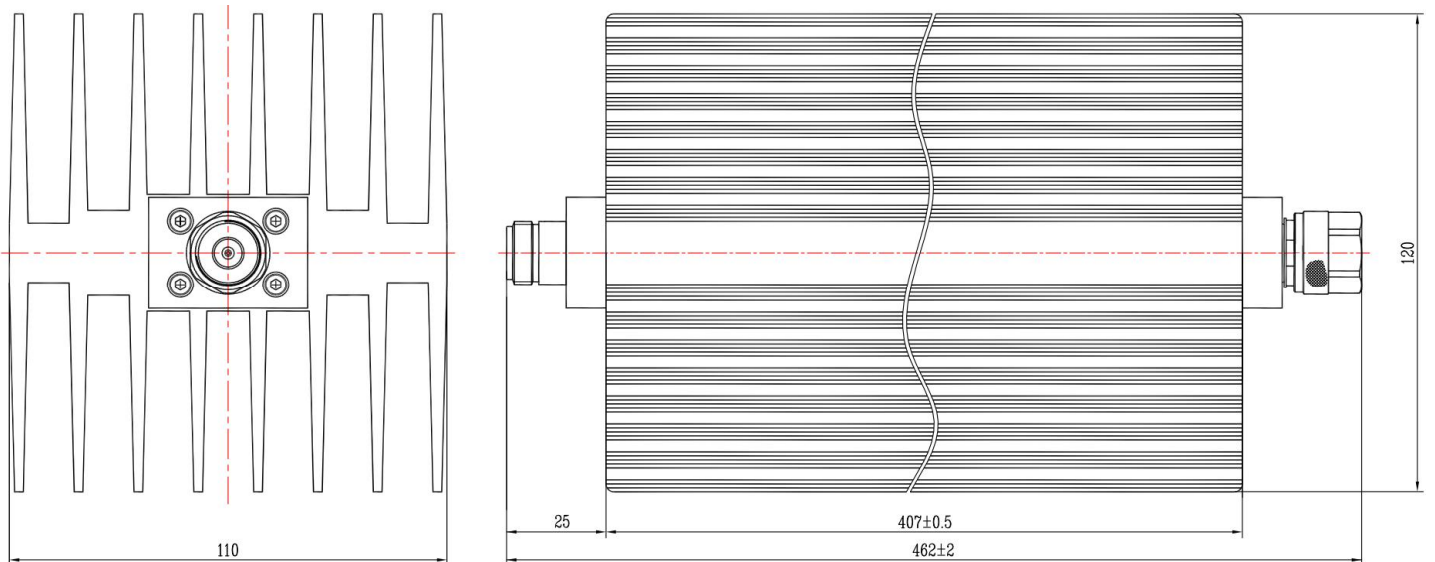

Notes

1. Always pay attention to the direction of attenuators.
2. To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
3. Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFH18XXND350-D

1. XX for dB value: 06=6dB, 30=30dB
2. Code for connector configuration:
 A=female for two ends; B=male for two ends
 C=female for input and male for output;
 D=male for input and female for output.