

TDC8225-4, DC Block

LAUFTEX

5MHz-40GHz,250V,2.92mm DC Block

ELECTRICAL

Frequency: 5MHz-40GHz

Insertion Loss: 0.5 dBMax

VSWR: 1.35Max

DC Voltage: 250 VOLTS

Impedance: 50 OHMS



MECHANICAL

Operation Temperature: $-55 \sim +100^{\circ}\text{C}$

Storage Temperature: $-55 \sim +125^{\circ}\text{C}$

Body Material: Passivated Stainless Steel


Center conductor: Becu, Golden

Connector 1: 2.92mm Male

Connector 2: 2.92mm Female

Relative Humidity: 0 ~ 90%

Outline Drawing

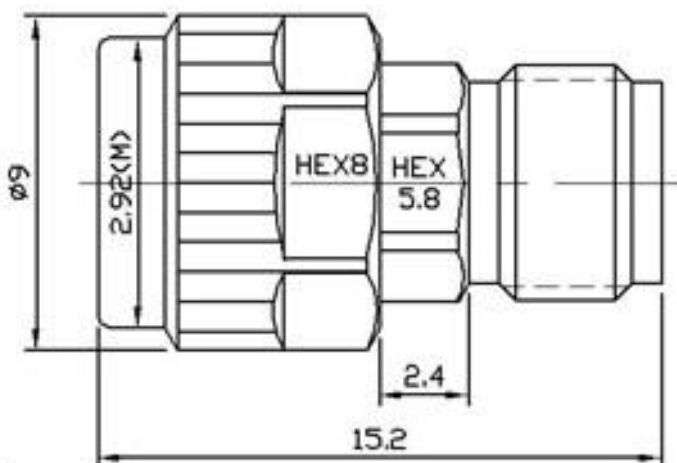

Unit: mm