



**Electrical**

|                        |  |
|------------------------|--|
| <b>Impedance</b>       | 50 ohm   |
| <b>Frequency Range</b> | DC-67 GHz  |
| <b>VSWR</b>            | 1.45 max   |
| <b>Input Avg Power</b> | 10W@25°C ambient, derating linearly to 1W at 100°C |
| <b>Peak Power</b>      | 50W (5 micro-sec pulse width, 6% duty cycle)       |


**Mechanical**

|                       |                            |
|-----------------------|----------------------------|
| <b>Connector Body</b> | Passivated stainless steel |
| <b>Center Contact</b> | 1.27um gold plated BeCu    |
| <b>Heat Sink</b>      | Black anodized aluminum    |


**Environmental**

|                       |                |
|-----------------------|----------------|
| <b>Operating Temp</b> | -55°C to 100°C |
| <b>Storage Temp</b>   | -55°C to 125°C |
| <b>RoHS</b>           | Compliant      |

**Dimensions(mm)**

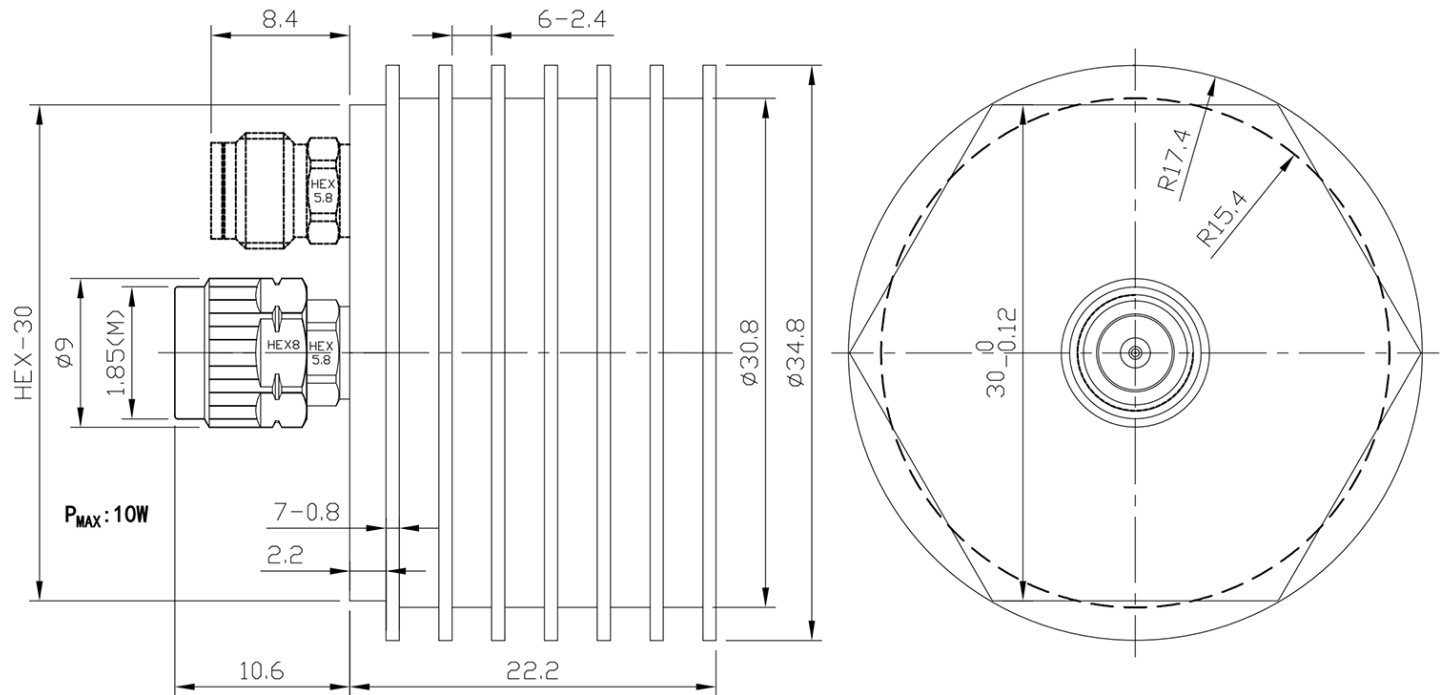

## Typical Test Data

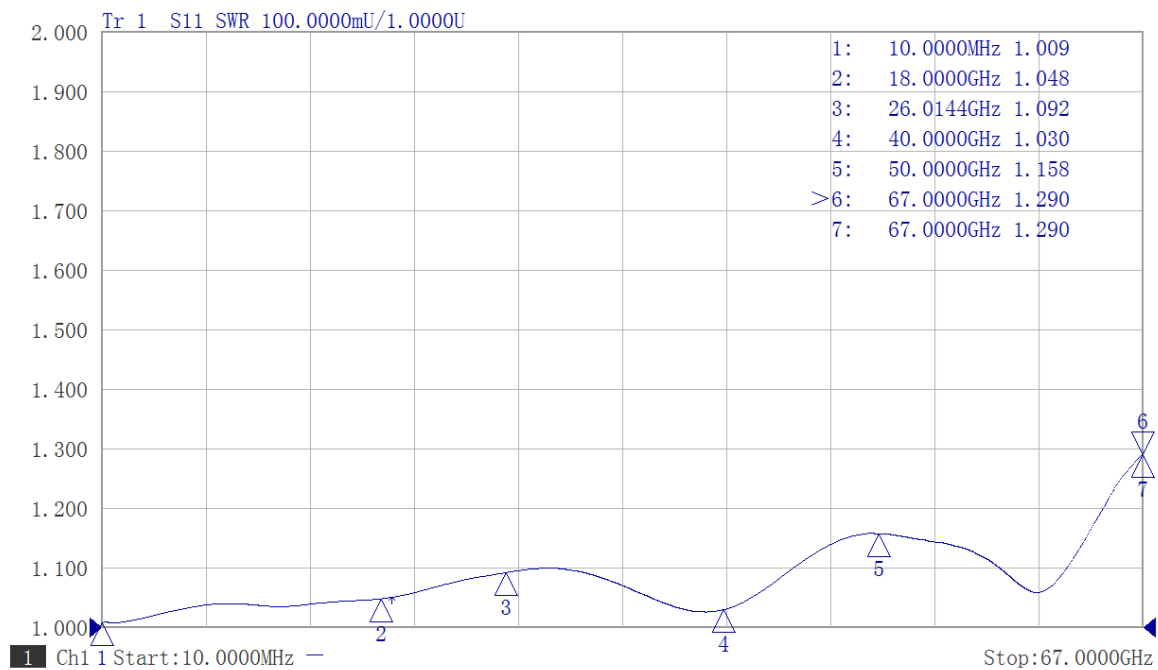

### Notes

1. Customized outlines and optimal VSWR available.
2. To maintain best performance, recommended to use fan to keep the case temperature under 85°C.