

Coaxial RF Termination

RFT2701SMP1

DC-27 GHz, SMP Female, 1 Watts



Rev 1

Electrical

Impedance	50 ohm
Frequency Range	DC-27 GHz
VSWR	1.3 max
Input Avg Power	1W@ 25°C ambient, derating linearly to 0.2W at 100°C
Peak Power	50W (5 micro-sec pulse width, 0.5% duty cycle)


Mechanical

Connector Body	Gold plated beryllium copper
Center Contact	Gold plated beryllium copper
Weight	About 5g

Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

Dimensions(mm)

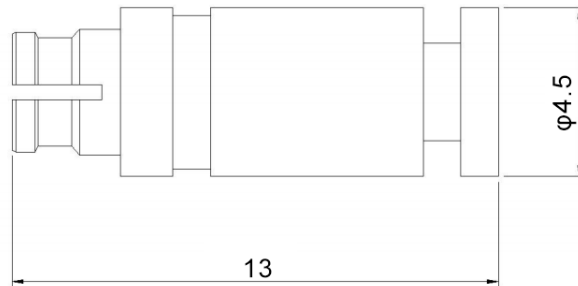

Typical Test Data

