
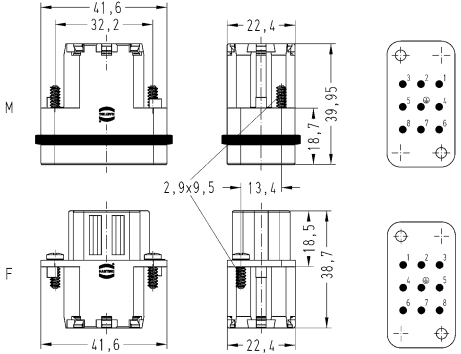


Number of contacts

**8+**

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm <sup>2</sup> )	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0,5 ... 2,5	09 12 008 2633	09 12 008 2733	
Han® Q , Han-Quick Lock® termination, Contact surface: Silver plated Black slide	0,25 ... 1,5	09 12 008 2634	09 12 008 2734	