


Drawing(mm)

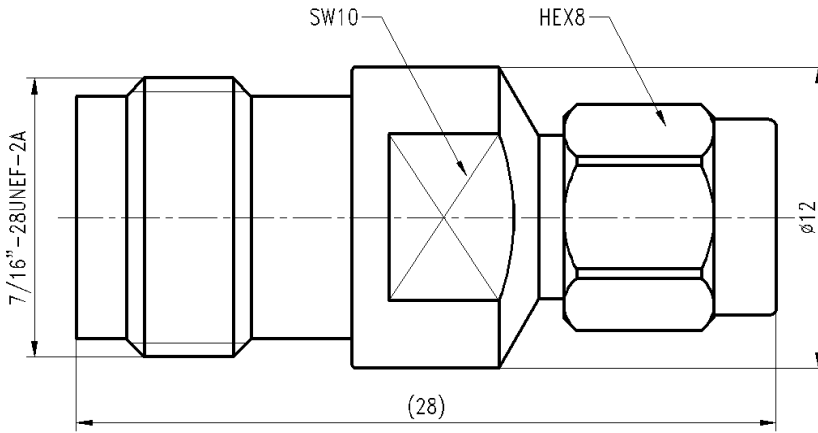

Electrical & Environmental

|                 |                          |
|-----------------|--------------------------|
| Impedance       | 50 ohm                   |
| Frequency Range | DC-18 GHz                |
| VSWR            | 1.2 max                  |
| Operating Temp  | -55°C to +165°C          |
| Interface       | SMA&TNCA per MIL-STD-348 |

Material

|                |                              |
|----------------|------------------------------|
| Connector Body | Passivated stainless steel   |
| Center Contact | Gold plated beryllium copper |
| Insulator      | PTFE                         |

Typical Test Data

