

# ACC-53S10-T

## SPDT Electromechanical Switch

Failsafe,DC to 40 GHz, TTL,2.92mm,Solder Pin

### Electrical Characteristics:

Parameter	Condition
Frequency Range	DC-40GHz
RF Impedance	50 Ohms
Operation Mode	Failsafe
Switch Sequence	Break before make
Switching time	15 ms Max
Standard Actuator Life	5 million Min
TTL Voltage	0-0.8 V(OFF) 2.4-5 V(ON)
Actuator voltage Available	12 24 28 V
Actuator current	200 100 80 mA



### RF Specifications:


Frequency (GHz)	DC-6	6-12	12-18	18-26.5	26.5-40
Insertion Loss (dB max.)	0.20	0.25	0.40	0.70	1.00
Isolation (dB min.)	70	70	60	55	50
VSWR (max.)	1.2:1	1.3:1	1.4:1	1.7:1	2.0:1
RF Power CW (Watts max.)	80	50	45	15	8

### Environmental And Physical Characteristics:



Parameter	Condition
Operating Temperature	-25°C to +65°C(Standard ) -55°C - +85°C(Optional)
Vibration(operating)	10G RMS, 20-2000HZ
Shock(non operating)	50G, 1/2Sine, 12msec
Connector Type	2.92mm Female
Control Connector	Solder Pin
Weight	70g Max

### Outline Drawing:

Unit: Inch(mm)



### Schematic:

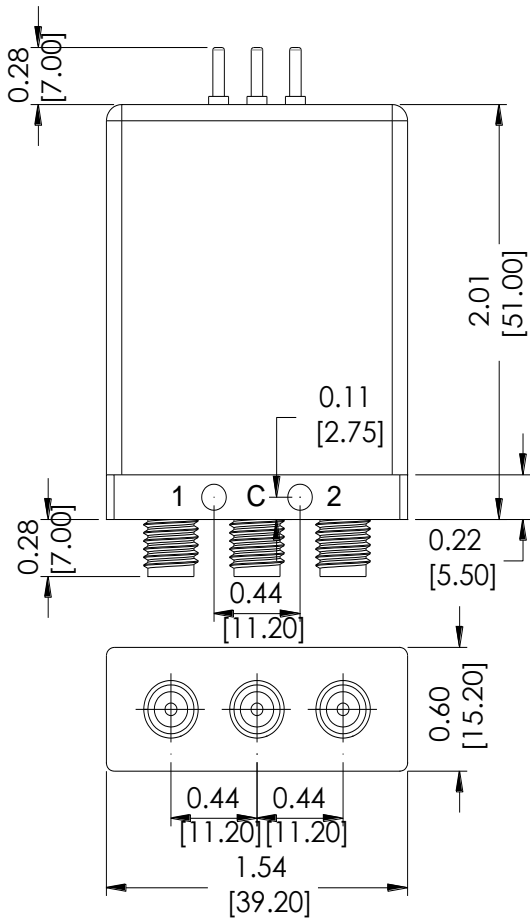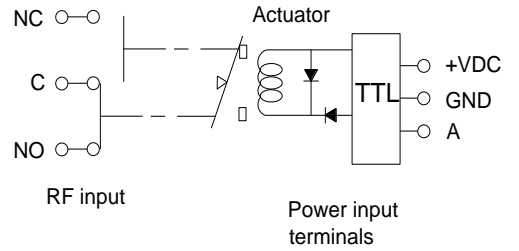


### Outline Drawing:


Model	Actuator voltage	Option
R12-KF12T40	12 V	-S(-55°C - +85°C)
R12-KF24T40	24 V	
R12-KF28T40	28 V	

### Typical Performance Data:

#### INSERTION LOSS

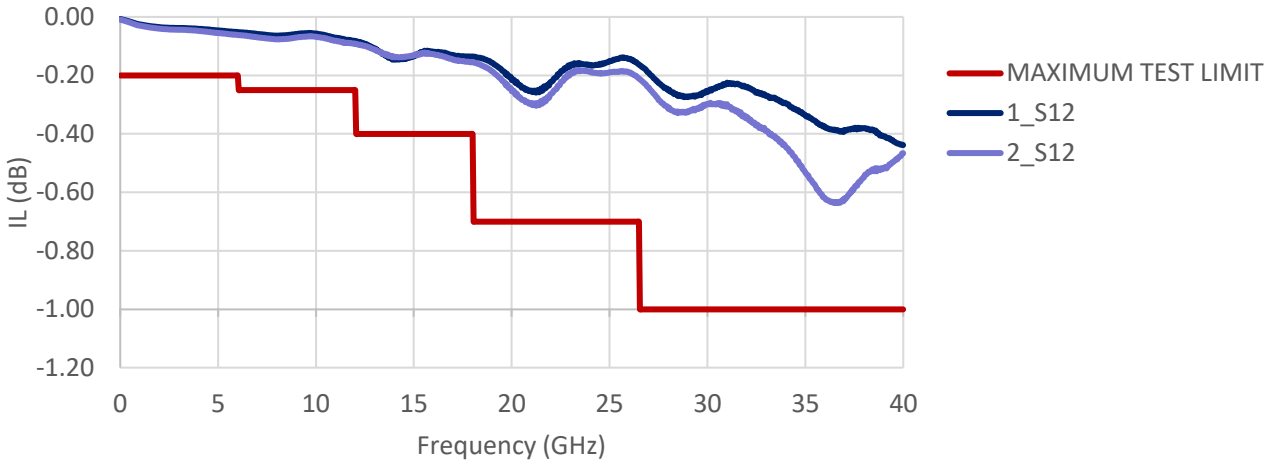

#### VSWR

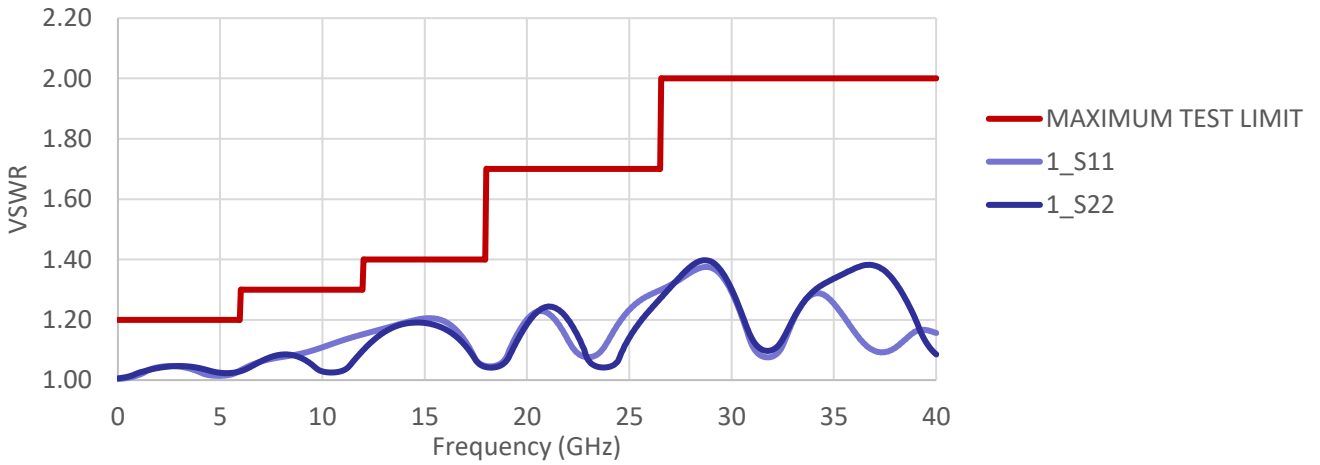

#### ISOLATION

